

Hobby model



	Hobby model
Overall dimensions:	1750×1750×1900mm
Bird capacity:	15–20 birds
Two-level layout:	Level 1: access ladder, feeding and drinking. Level 2: laying nests, perches and slatted floor, with a removable manure tray at the base for easy manure removal.
Fixed wheels:	12-inch diameter
Swivel wheels:	10-inch diameter
Frame material:	1.5 mm and 2.0 mm galvanized aluminum–magnesium sheet
Slatted floor size:	1200×600mm
Roof:	10 mm polycarbonate panel

Customized options available — designed for expansion

We offer customized configurations: optional equipment such as solar panels can be fitted as required, adapting the mobile house to a wide range of farming needs.

Mobile chassis system

Chassis legs support and level the house; the front towing hitch and hand-cranked jack make it easy to move and adjust the height.




Insulated frame system

20 kg/m³ insulation panels — fire-resistant with reliable thermal insulation.



Feeding & drinking system

Drinking water passes through a filter system; feed is delivered by a hand-cranked auger.



Egg collection system

Laying nests with rear frame and collection table; eggs are gathered by hand crank.



Ventilation system

Direct-opening side windows adjust in angle to control airflow. Exhaust fans run from an independent control box that can be connected to an external power supply.



Perch & lighting system

Perches allow the flock to roost off the floor. The lighting system supports hen growth and development, with adjustable light schedule and intensity.



Welfare door system


An access ladder lets hens move in and out freely, giving them room to range.



MOBILE POULTRY HOUSE




Single-tier floor model

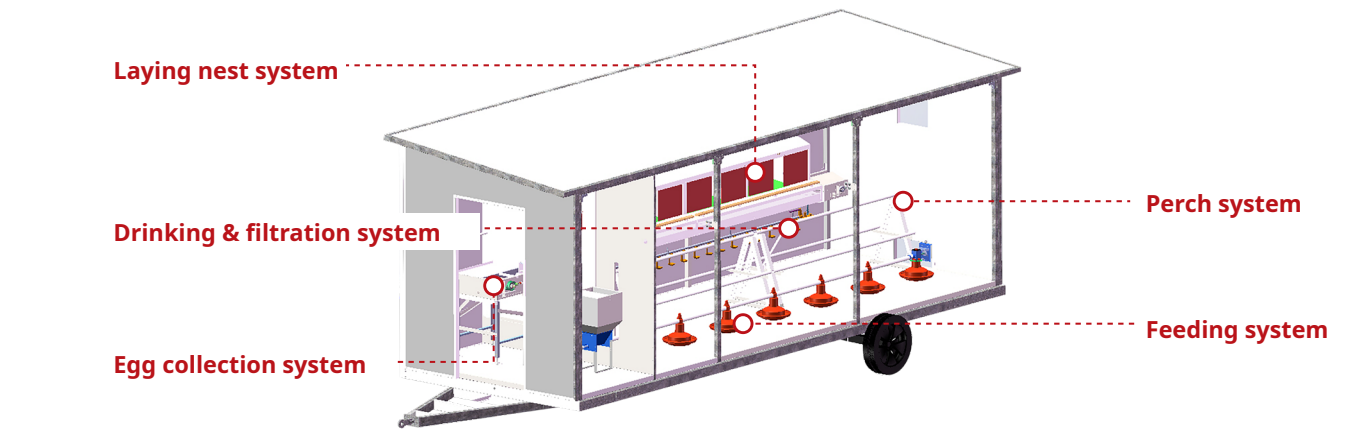

	Assembly version	Mobile version
Floor area:	16 m²	16 m²
Bird capacity:	180–200 birds	180–200 birds
Dimensions:	6800/9000×2400×2600mm	6800/9000×2400×2600mm
Insulation thickness:	30–50 mm (optional)	30–50 mm (optional)
Lift height range:	360–550 mm stroke	360–550 mm stroke
Towing jack lift range:		260–684 mm
Tires:		Solid tires
Total length incl. towbar:		8504 mm

Multi-tier floor model

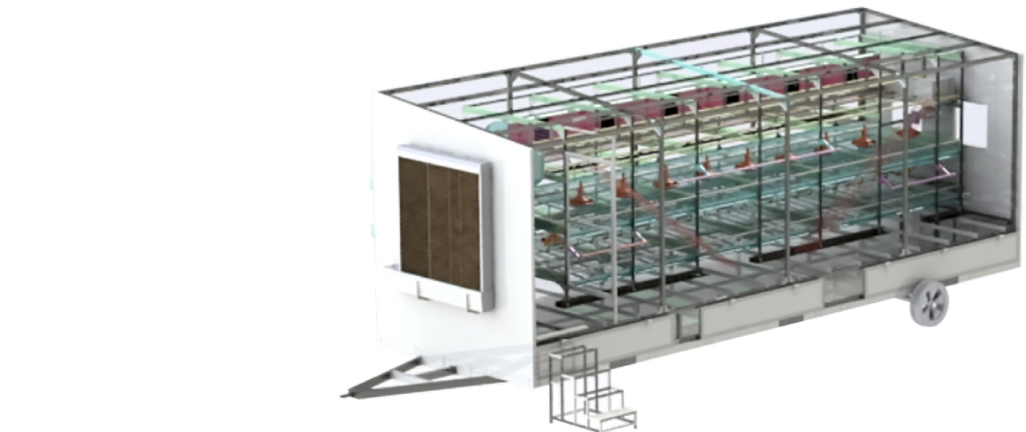

	Multi-tier floor model
Floor area:	25.8 m²
Bird capacity:	400 birds
Dimensions:	9000×3000×3400mm
Insulation thickness:	30–50 mm (optional)
Lift height range:	360–550 mm stroke
Towing jack lift range:	260–684 mm
Tires:	Solid tires
Total length incl. towbar:	11081 mm
Multi-level free-range size:	7440×1950×2300mm

Pullet rearing model



	Pullet cage model
Overall dimensions:	6800×2400×2600mm
Cage specifications:	5258×950×2145mm
Bird capacity:	144 birds
Pullet cages:	Three tiers, 12 cages per tier; cage unit size 425×800×500 mm
Flooring:	PVC floor mat for quick and easy cleaning
Climate equipment:	Fans, cooling pads, louver windows, lighting, temperature sensor